

Caterpillar 745 Articulating Truck

Custom Designed Automatic Lubrication system integrated on a CAT 745 Articulating Truck built to withstand the harshest environments.

The system includes:

- Compact Dynastar pump mounted on the right hand walkway and is fully operated by a GLCX controller conveniently located in the cab.
- A ground level autofill shutoff with laser etched instructions enables operators to fill the lubricator correctly every time.
- Designed as a series-progressive lubrication system using MSP divider valves to ensure each lubrication point is getting the right amount of grease.



**Industrial Lubrication Equipment
AUTHORIZED DISTRIBUTOR**

**Effortless Auto
Lubrication with
Bluetooth Connectivity**



Stainless Mounting with Laser Etched Lubrication Schematic



Autofill Shutoff with Laser Etched Grease Fill Instructions



GLCX Controller Located Above Console in Cab

Graco Automatic Lubrication Systems deliver benefit-driven solutions that save you time and money.


The Compact Dynastar is built tough with it's all metal construction and is perfect for any large equipment offering reliable lubrication.

Specifications

- 12 Liter (30LB) reservoir
- Output of 4.5 cubic inches per minute (74cc/minute)
- Output pressure 3500 psi
- 1 Main and 2 Secondary MSP banks
- Follower Plate
- Cycle Counter
- Programmable GLCX Controller with Bluetooth connection via the Graco Auto Lube App
- 24V Power
- Auto Fill Shutoff Located Ground Level



Custom Bolt on bracket designed to fit specifically on this unit

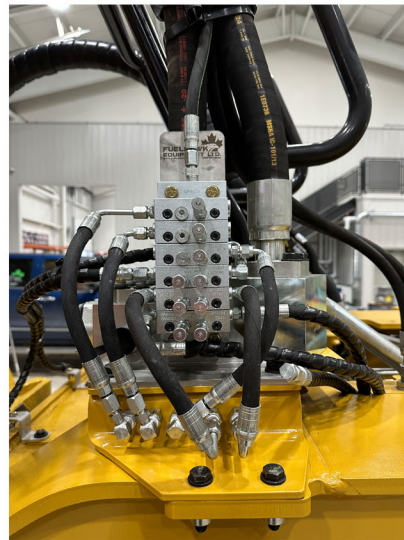

18 Lube Points active with the Compact Dynastar Install on a CAT 745

